


Setting up a Reliance Netconnect Broadband+ USB Modem on Dovado UMR

1. Open a web browser
2. Enter <http://192.168.0.1>
3. A username password screen will appear. Enter the default username and password. You will find this in the manual provided.
4. Once logged in click on Modem on the left hand side and then PPP on the blue bar at the top
5. You will then see this screen.

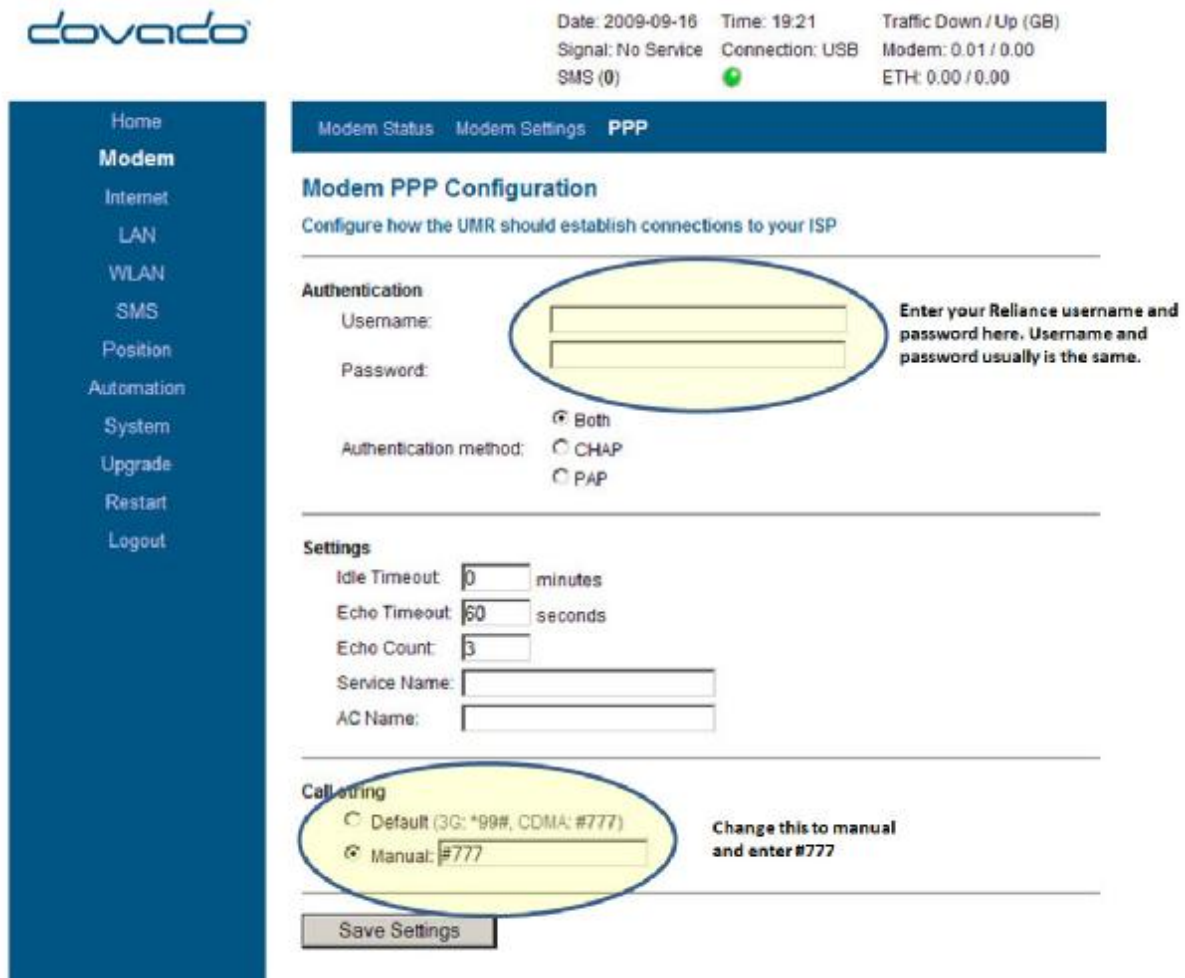

dovado

Date: 2009-09-16 Time: 19:21 Traffic Down / Up (GB)
 Signal: No Service Connection: USB Modem: 0.01 / 0.00
 SMS (0) ● ETH: 0.00 / 0.00

Modem Status Modem Settings **PPP**

Modem PPP Configuration

Configure how the UMR should establish connections to your ISP

Authentication

Username:

Password:

Authentication method: Both CHAP PAP

Enter your Reliance username and password here. Username and password usually is the same.

Settings

Idle Timeout: minutes

Echo Timeout: seconds

Echo Count:

Service Name:

AC Name:

Calling

Default (3G: *99#, CDMA: #777) Manual:

Change this to manual and enter #777

6. For Reliance Netconnect Broadband+ the Authentication username and password are usually the mobile number issued to the data card. Please refer to the details supplied with your modem for the username and password.
7. You will also need to change the call string to manual and enter #777
8. Save your settings and then click on the restart button on the left hand side.
9. Once the device is rebooted it will take about 60 to 90 seconds to connect. When it's connected you will see a green dot at the top of the administration screen.
10. Happy surfing.