


Setting up a MTS MBlaze Premium USB Modem on Dovado UMR

1. Open a web browser
2. Enter <http://192.168.0.1>
3. A username password screen will appear. Enter the default username and password. You will find this in the manual provided.
4. Once logged in click on Modem on the left hand side and then PPP on the blue bar at the top
5. You will then see this screen.

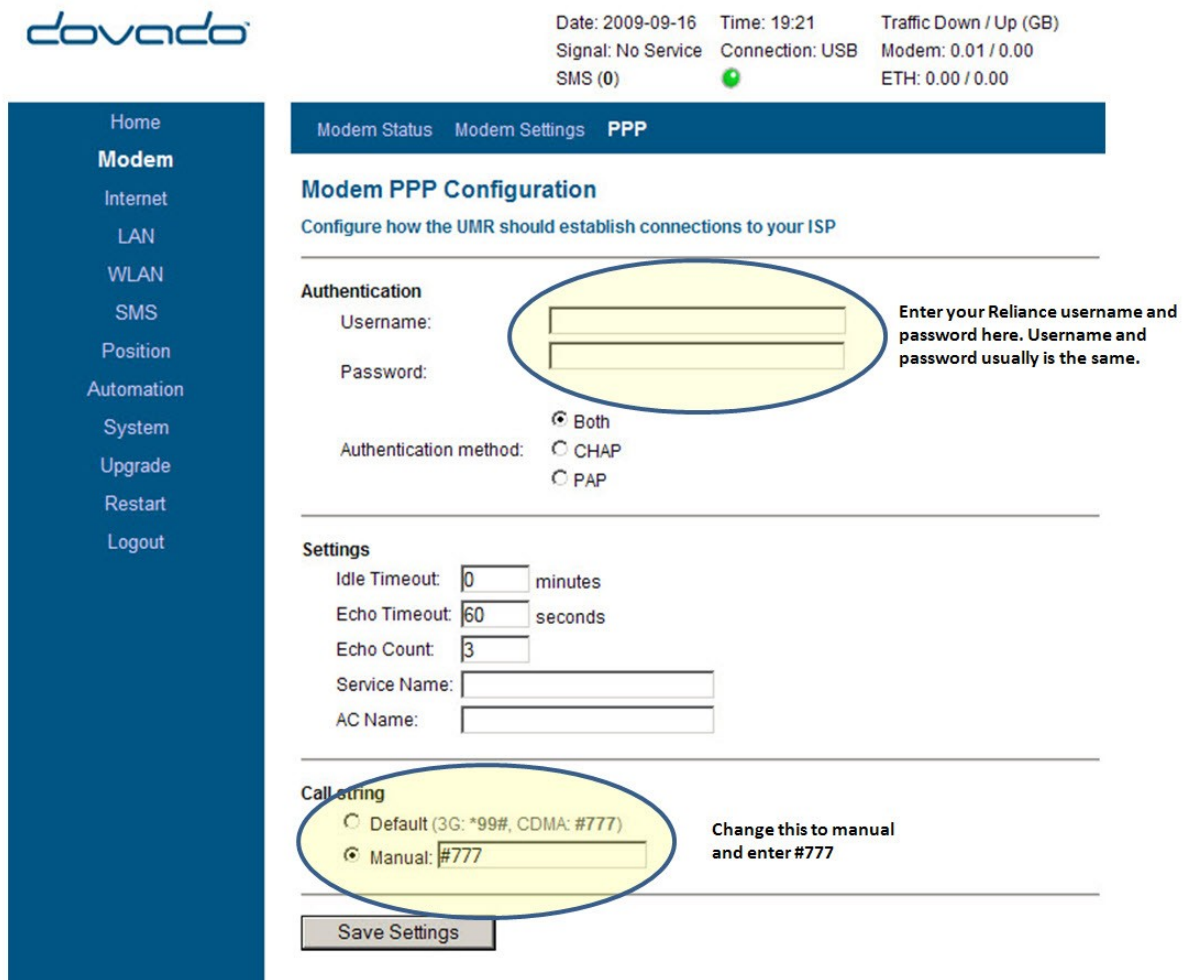

Date: 2009-09-16 Time: 19:21 Traffic Down / Up (GB)
Signal: No Service Connection: USB Modem: 0.01 / 0.00
SMS (0) ● ETH: 0.00 / 0.00

Home
Modem
Internet
LAN
WLAN
SMS
Position
Automation
System
Upgrade
Restart
Logout

Modem Status Modem Settings **PPP**

Modem PPP Configuration

Configure how the UMR should establish connections to your ISP

Authentication

Username:

Password:

Enter your Reliance username and password here. Username and password usually is the same.

Authentication method: Both
 CHAP
 PAP

Settings

Idle Timeout: minutes

Echo Timeout: seconds

Echo Count:

Service Name:

AC Name:

Calling

Default (3G: *99#, CDMA: #777)

Manual:

Change this to manual and enter #777

6. For MTS MBlaze Premium prepaid the Authentication username and password are
Username: internet@internet.mtsindia.in **Password:** MTS
7. You will also need to change the call string to manual and enter #777
8. Save your settings and then click on the restart button on the left hand side.
9. Once the device is rebooted it will take about 60 to 90 seconds to connect. When it's connected you will see a green dot at the top of the administration screen.
10. Happy surfing.